
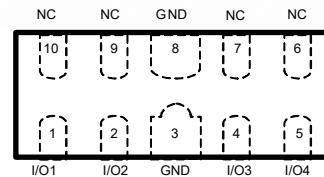


## Features

- Bidirectional configurations
- Solid-state silicon-avalanche technology
- Low clamping voltage
- Low leakage current
- Low clamping voltage:  $V_{CL} = 5.6V$  typ. @  $I_{PP} = 16A$  (TLP)
- Low capacitance ( $Cj=0.3pF$  typ. IO-IO )
- IEC 61000-4-2  $\pm 10kV$  (contact discharge)  
 $\pm 15kV$  (air discharge)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 4.5A (8/20 $\mu s$ )

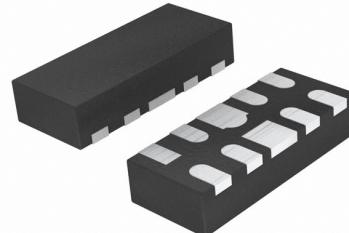


## Applications

- USB3.0, USB3.1 interface
- HDMI1.3,HDMI1.4 and HDMI2.0
- industrial equipment
- Digital Visual Interface
- Notebooks

## Mechanical Data

- Tiny DFN10L(2.5mmx1.0mm) package
- Molding compound flammability rating: UL 94V-0
- Packaging: Tape and Reel
- RoHS/WEEE Compliant

## Schematic & PIN Configuration

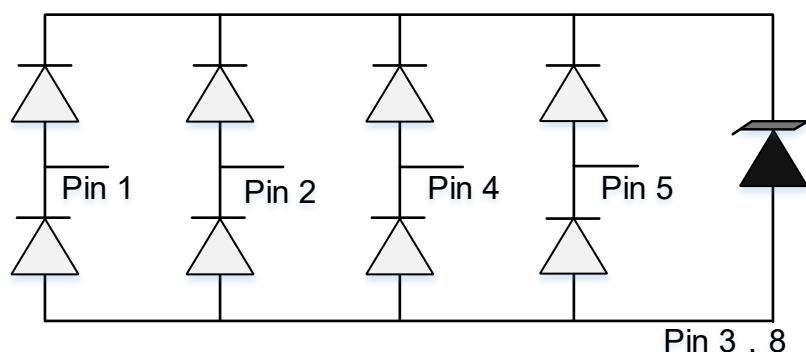

**Absolute Maximum Rating**


Rating	Symbol	Value	Units
Peak Pulse Power ( $t_p = 8/20\mu s$ )	$P_{PP}$	35	Watts
Peak Pulse Current ( $t_p = 8/20\mu s$ ) (note1)	$I_{PP}$	4.5	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	$V_{ESD}$	15 10	kV
Lead Soldering Temperature	$T_L$	260(10seconds)	°C
Junction Temperature	$T_J$	-55 to + 125	°C
Storage Temperature	$T_{stg}$	-55 to + 125	°C

**Electrical Characteristics**

Parameter	Symbol	Conditions	Min	Typical	Max	Units
Reverse Stand-Off Voltage	$V_{RWM}$				3.3	V
Holding Voltage	$V_H$	$I_T=I_H$	2.2			V
Holding Current	$I_H$		15			mA
Reverse Leakage Current	$I_R$	$V_{RWM}=3.3V, T=25°C$			200	nA
Clamping Voltage	$V_C$	$I_{PP}=4.5A, t_p=8/20\mu s$		5.6	7	V
Trigger Voltage	$V_T$			12	19	V
Junction Capacitance	$C_j$	$V_R = 1.5V, f = 1MHz$ IO to IO		0.3		pF
		$V_R = 1.5V, f = 1MHz$ IO to Gnd		0.6		pF

**Electrical Parameters (TA = 25°C unless otherwise noted)**

Symbol	Parameter
$I_{PP}$	Maximum Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$
$V_{RWM}$	Working Peak Reverse Voltage
$I_R$	Maximum Reverse Leakage Current @ $V_{RWM}$
$V_T$	Trigger voltage
$I_T$	Test Current
$V_H$	Holding voltage
$I_H$	Holding Current

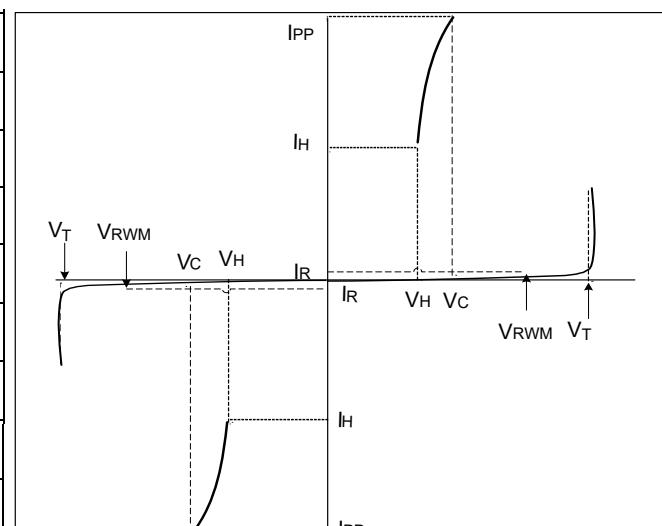

Note: 8/20μs pulse waveform.

## Typical Characteristic Curves

Fig.1 Peak Pulse Power Rating Curve

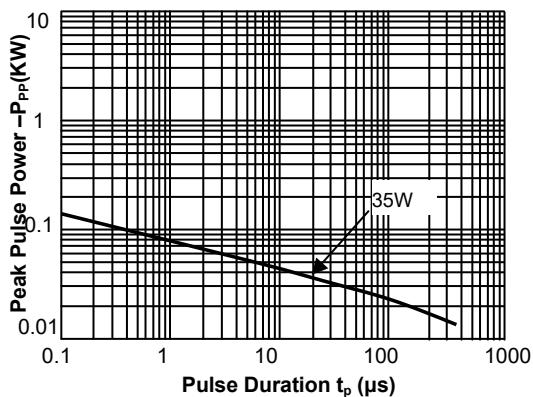


Fig.2 Pulse Derating Curve

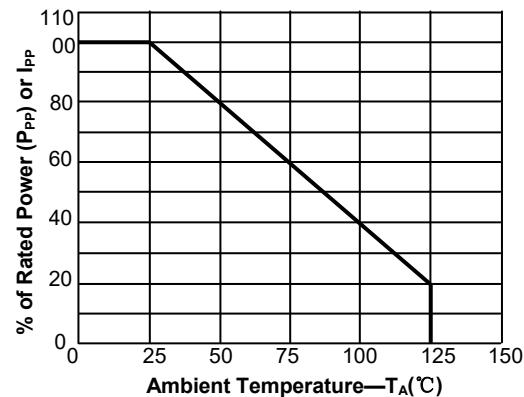


Fig.3 Pulse Waveform-8/20μs

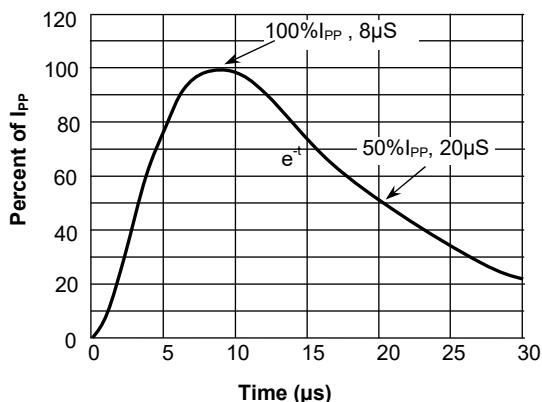


Fig.4 Pulse Waveform-ESD(IEC61000-4-2)

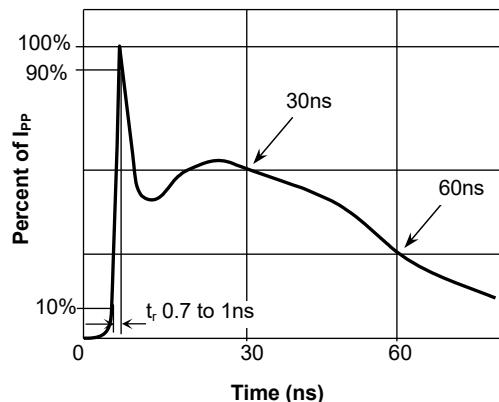


Fig.5 Measurement



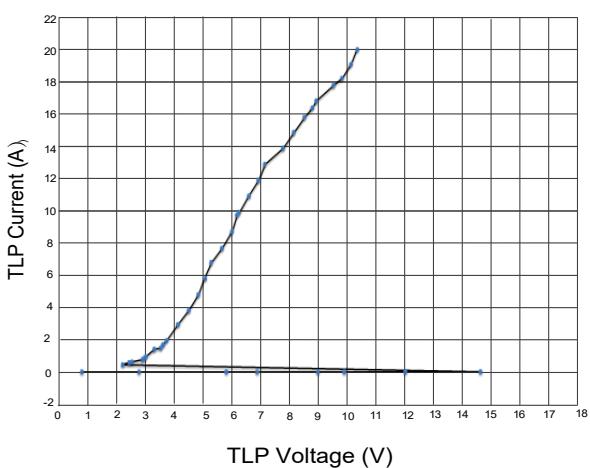


Fig.6 Clamping Voltage vs. Peak Pulse Current

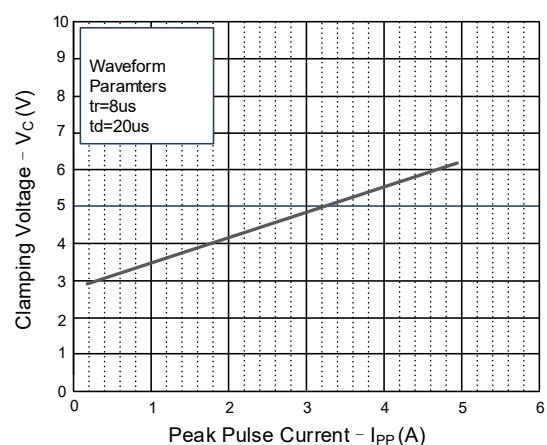

## Outline Drawing – DFN10L(2.5mmx1.0mm)

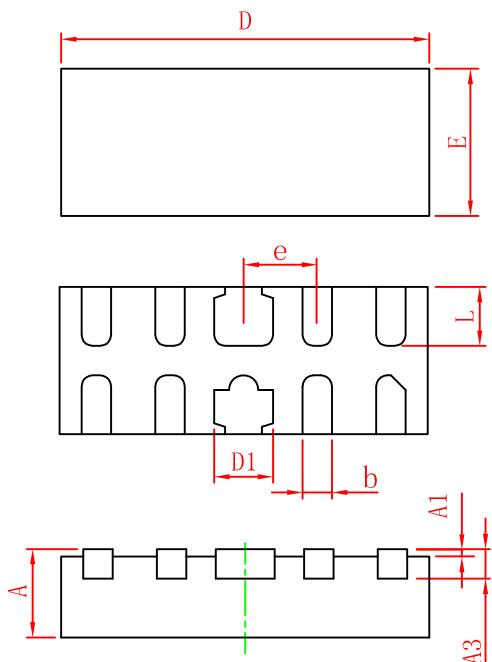

Symbol	Dimensions in millimeters		
	Min	Nom	Max
A	0.45	0.50	0.60
A1	-	0.02	0.05
A3	0.10	0.15	0.20
D	2.45	2.50	2.55
E	0.95	1.00	1.05
D1	0.35	0.40	0.45
b	0.15	0.20	0.25
e	0.50BSC		
L	0.35	0.40	0.45

## Marking



## Ordering information

Order code	Package	Base qty	Delivery mode
LKC0324PE	DFN10L(2.5mmx1.0mm)	3k	Tape and reel